



Gaiasky-mini Hyperspectral Imaging Camera





Gaiasky-mini Hyperspectral Imaging Camera

GaiaSky-VIS/NIR camera provide extremely high resolution images by scanning and taking multiple images to construct a hyperspectral datacube. Hyperspectral imaging devices (GaiaSky) for lens scanning obtain slit spectra by projecting a strip of the scene onto a slit and dispersing the slit image with a prism or a grating. In lens scanning, each two-dimensional (2-D) sensor output represents a full slit spectrum (x, λ). The NUC integrated into the system to control system operation ,data acquisition, and analyze , so the spatial dimension is collected through the scanning motor movement.

GaiaSky camera connects with DJ UAV, user only need control the UAV by controller fly to the test area and specific height, then the UAV receive the trigger signal from the operator, the system will work and save data to the internal NUC , when finish capture the first point so the UAV can automatically fly to next position which user set before fly until finish the last position collect.






GaiaSkySystem Function:

- Auto exposure time;
- Auto match scanning speed;
- Auxiliary camera (user can observe you want);
- Data analysis (reflectance /radiometric/uniformity/lens/area /atmospheric/calibration)
- Spectra /imaging view and export;
- Spectral Angle matching;

- NDVI(advance custom);
- PCA;
- Supervised classification;
- Support lens change;
- Standard type data (support envi/envice/matlab);
- Images stitching;









Anadologicalning Tokokokokokokokoko	intelectoral and a second and a
100000000000000000000000000000000000000	O DOMESTIC OF THE OWNER O
TOROROROROROR MOROROROROROROR	***************************************
ADSCRIPTION OF SCHOOLS	\$0404040404040¥ \$040404040404040
SONONONONONON HONONONONONONONO	*******************************
0 0	9 9
0	0
604040404040404 #04040404040404	TOTOTOTOTOTOTO & CHOTOTOTOTOTOTO
ADROSOSOSOSOS ADROSOSOSOSOSOS	*************************
Sonononononon nonononononono	POROROROROROR ACROSOROROROROROR
	#0404040404040# #04040404040404
#OROROROROROR #ORORORORORORO	TOTOSOSOSOSOS SOSOSOSOSOSOSOS
ACADADADADADA PORCADADADADA	tototototototo Pototototototot
Charles and the control of the contr	**************************************
dototototototo fototototototot	***********************
SOSOSOSOSOSOS SOSOSOSOSOSOSOS	#04040404040404 #04040404040404
ANADADADADADE PORDEDADADADA	CHOMOMOMOMOM ROMOMOMOMOMOMOMO
TOROROROROROR MORORORORORORO	Todolodododod godolododododo
epecepacepage epecephologos	**********************
SOLOHOLOLOLOLO ACACACACACACACACACA	SOSOSOSOSOSOS SOSOSOSOSOSOSOS
40404040404040404040404040404	40404040404040404040404040404
EGROROROROROR BOROROROROROROR	************************
*********************	#08080808080808 #0808080808080808
204040404040404040404040404040404040404	LOSOSOSOSOSOS MOSOSOSOSOSOSOS





2.2. GaiaSky System Parameters

Instrument model	Gaiasky	y-mini2-VN	Gaiasky-mini-VN		Gaiasky-mini-VN-W		
Spectral Region(nm)	400-1000nm						
Spectral resolution	3.5nm						
Numerical Aperture	F/2.8						
Spectral channel number	0.	0.5nm 0.7nm		0.7nm			
Pixels	1936	x 1456	1392 x 1040		1392 x 1040		
Pixel pitch	4.8	54um	6.45u	m	6.45um		
Digital OutPut	14(bit)						
Signal Connector	US	B 3.0	USB 2.0		USB2.0		
Power	12~19V						
Power Consumption	45W						
Carrying platform	DJI M600 Pro						
lens	18.5mm, 23mm						
(FOVac, °)	26.7@18.5mm,21.5@23mm 27.3@18.5mm,22.08@23mm			27.3@18.5mm,22.08@23mm			
The transverse view	142M@18.5mm, 115M@23mm(Flight altitude 300M)		146M@18.5mm, 117M@23mm(Flightaltitude 300M)		146M@18.5mm, 117M@23mm(Flight altitude 300M)		
Ingle image resolution	1920X2080(1)	<), 960X1040(2X)	1392X1400(1X), 696X700(2X)		None		
Spectral channel number	1440(1X), 720(2X), 360(4X), 176(8X)	1040(1X), 520(2X), 256(4X), 128(8X)		1040(1X), 520(2X)	, 256(4X), 128(8X)	
Spatial resolution	0.118(@23mm,Height 300m)		0.168(@23mm, ,Height 300m)		0.168(@23mm, ,Height 300m)		
Scanning speed (line images/s)	125(360)	160(176channel)	60(360channel)	84(176channel)	60(360channel)	84(176channel	
Single shotspeed (s)	9@360channel	7@176channel	13@360channel	9@176channel	None		
Weight	1.5kg			1kg			
Memory	240G SSD(512G,1T Optional)						


GaiaSky System Apply:


There are many applications which can take advantage of hyperspectral imaging.

- Environmental: water quality monitoring atmospheric monitoring of the Marine environment
- Agricultural: plant disease feature classification agricultural census
- Military: anti-camouflage
- Geological research: mineral exploration, basic geological survey, soil quality survey

Agricultural:

The application of hyperspectral in agricultural field is the most extensive and a relatively mature. It has a wide and far-reaching application prospect in the detection of crop growth classification diseases and insect pests and the investigation of forestry resources. The spectral characteristics of vegetation mainly depend on the chlorophyll content and composition in the leaves. Normally growing plants have typical spectral shapes.

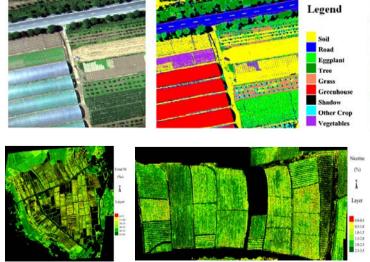




Progress of potato damage from late blight development over time. The red overlay shows damaged parts detected by image processing on (a) 7/17, (b) 7/18, (c) 7/23, (d) 7/25, (e) 7/26, (f) 7/27, (g) 7/30, (h) 8/2, (i) 8/3, (j) 8/7 and (k) 8/15.





Environmental:


The environment is becoming more and more prominent in modern society, but the traditional environmental monitoring methods cannot get the results quickly and in real time and the process is complicated. The spectral technology can effectively identify the sediment content and pollution concentration of water body and has unique effect on the investigation and monitoring of environmental problems.

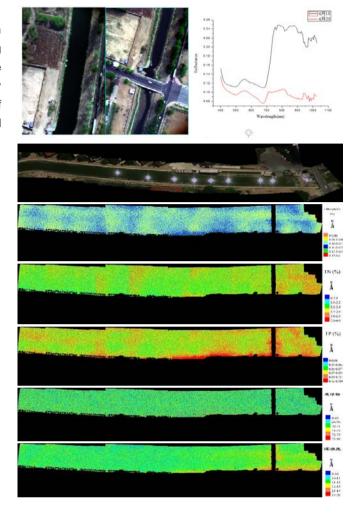

Military:

In the military field is mainly in the near infrared and infrared spectral band. Gaiasky-mini2nir is very good at detecting camouflage.













Geological research

Rock and mineral geological structure identification is an important application field of imaging hyperspectral system in geological exploration. Hyperspectral imaging technology also provides more abundant data for land survey and evaluation, which is of great significance to the management of land resource.





Sichuan Dualix Spectral Imaging Technology Co.,Ltd.

Beijing:

Address: LDUV 68B, No. 16 Huanke Middle Rd, Golden Bridge Science and Technology Industrial Base, Zhongguancun Science Park Tongzhou Zone, Tongzhou District, Beijing China(101102).

Tel: 010 5637 0168 Fax: 010 5637 0118 www.dualix.com.cn